

CALPICO INC.

CALPICO MODEL P CASING INSULATORS

*The ideal solution
for small pipe....*



*& applications where annular
space is tight & pipe bell or
coupling does not exist.*

Ideal for applications using small pipe sizes, as small as 1". Calpico Model P insulators are made of high density (linear) polyethylene. This material provides high impact strength, a low coefficient of friction and excellent abrasion resistance.

The high insulating value and low water absorption characteristics of the non-filled, polyethylene assures negligible current loss, positive insulation and complete cathodic protection.

Model P insulators are light in weight, economical, easy to handle and easy to install. No special tools are needed.


Non-deteriorating polyethylene lasts indefinitely in the casing. The only metal present is the connecting bolts. A ribbed inner surface prevents slippage and coating damage.

Calpico Model P insulators are made in two halves for pipe sizes in the 1" through 12" range. Polyethylene runners are molded in each insulator section. Runner height for all sizes is less than 1". All bolts, nuts, and washers are cadmium plated and these are shipped in a package with the insulators. Stainless steel hardware is also available, which is our Model P-SS. Spacing every 4' - 6', or per engineer specification or application requirements. Pipe with a tendency to bow may require additional spacers.

Standard Specification:

- | | | |
|---|------------------------------|-------------------------------|
| • | ESPREE Nylon Resin GYSL-1000 | |
| • | Melting Point: | 480° - 500° F |
| • | Specific Gravity (water-1): | >1 |
| • | Water Solubility: | Insoluble |
| • | Compressive Strength | 3200 psi ASTM D-693 |
| • | Density: | 0.960 ASTM D-792 |
| • | Tensile Strength | 3100-5500 psi ASTM D-638 |
| • | Yield Strength: | 3000 psi ASTM D-638 |
| • | Break Strength: | 2100 psi ASTM D-638 |
| • | Flexural Strength: | 1110 psi ASTM D-790 |
| • | Impact Strength: | 1.1 ft.lb/in. ASTM D-256 |

Typical carrier pipe type: IPS only

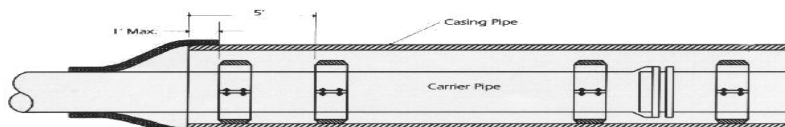

1387 San Mateo Ave.; So. San Francisco, CA 94080
650 588-2241; 1-800-998-9115; Fax: 650 873-6952